

# PUMP PARTS PLUS

## 2018 PARTS CATALOG

CONCRETE PUMP PARTS & ACCESSORIES



**800.567.7400**  
[www.pumppartsplus.com](http://www.pumppartsplus.com)



| <b>TABLE OF CONTENTS</b>             |                  |
|--------------------------------------|------------------|
| <b>Pipe Bends</b>                    | <b>pg. 3</b>     |
| <b>Reducing Elbows</b>               | <b>pg. 4</b>     |
| <b>Slickline</b>                     | <b>pg. 4</b>     |
| <b>Steel Reducers</b>                | <b>pg. 5</b>     |
| <b>Boom Elbows</b>                   | <b>pg. 6</b>     |
| <b>Boom Pipe</b>                     | <b>pg. 7</b>     |
| <b>Placing Hose—Fabric</b>           | <b>pg. 8</b>     |
| <b>Placing Hose—Steel</b>            | <b>pg. 9</b>     |
| <b>Hose Stems &amp; Ferrules</b>     | <b>pg. 10</b>    |
| <b>Shotcrete Nozzles</b>             | <b>pg. 10</b>    |
| <b>Clean-out Accessories</b>         | <b>pg. 11</b>    |
| <b>Couplings/Gaskets</b>             | <b>pg. 12-14</b> |
| <b>Weld-on Ends</b>                  | <b>pg. 15</b>    |
| <b>Reed B50/C50 Wear Parts</b>       | <b>pg. 16</b>    |
| <b>Schwing Trailer Parts</b>         | <b>pg. 17</b>    |
| <b>Schwing Boom Pump Parts</b>       | <b>pg. 18-19</b> |
| <b>Putzmeister Wear Parts</b>        | <b>pg. 20-21</b> |
| <b>General Pumping Accessories</b>   | <b>pg. 22-23</b> |
| <b>Chemicals &amp; Add Mixtures</b>  | <b>pg. 24</b>    |
| <b>Wireless Remote Controls</b>      | <b>pg. 25</b>    |
| <b>Notes and Contact Information</b> | <b>pg. 26</b>    |

# PIPE BENDS



| Part No. | ID In. | Bend | CLR | Weight  |
|----------|--------|------|-----|---------|
| PB209016 | 2.0    | 90   | 16  | 10 lbs  |
| PB204516 | 2.0    | 45   | 16  | 6 lbs   |
| PB202216 | 2.0    | 22.5 | 16  | 4 lbs   |
| PB209048 | 2.0    | 90   | 48  | 38 lbs  |
| PB204548 | 2.0    | 45   | 48  | 20 lbs  |
| PB259016 | 2.5    | 90   | 16  | 15 lbs  |
| PB254516 | 2.5    | 45   | 16  | 9 lbs   |
| PB259048 | 2.5    | 90   | 48  | 46 lbs  |
| PB254548 | 2.5    | 45   | 48  | 23 lbs  |
| PB309016 | 3.0    | 90   | 16  | 23 lbs  |
| PB304516 | 3.0    | 45   | 16  | 12 lbs  |
| PB309024 | 3.0    | 90   | 24  | 30 lbs  |
| PB309048 | 3.0    | 90   | 48  | 57 lbs  |
| PB304548 | 3.0    | 45   | 48  | 28 lbs  |
| PB409018 | 4.0    | 90   | 18  | 30 lbs  |
| PB404518 | 4.0    | 45   | 18  | 17 lbs  |
| PB409048 | 4.0    | 90   | 48  | 72 lbs  |
| PB404548 | 4.0    | 45   | 48  | 38 lbs  |
| PB509024 | 5.0    | 90   | 24  | 49 lbs  |
| PB504524 | 5.0    | 45   | 24  | 25 lbs  |
| PB509048 | 5.0    | 90   | 48  | 118 lbs |
| PB504548 | 5.0    | 45   | 48  | 59 lbs  |

# REDUCING ELBOWS



| Part No.     | Pipe ID In.       | Bend | Weight |
|--------------|-------------------|------|--------|
| RE302090HH   | 3.0 X 2.0 HD-HD   | 90   | 8 lbs  |
| RE403090HH   | 4.0 X 3.0 Cast    | 90   | 19 lbs |
| RE503090HH   | 5.0 X 3.0 Cast    | 90   | 26 lbs |
| RE504090HH   | 5.0 X 4.0 Cast    | 90   | 28 lbs |
| RE504090M-H  | 5.0 X 4.0 Met-HD  | 90   | 28 lbs |
| RE605090MM   | 6.0 X 5.0 Met-Met | 90   | 31 lbs |
| RE605090ZX-M | 6.0 X 5.0 ZX-Met  | 90   | 27 lbs |
| RE6050ZX-HD  | 6.0 X 5.0 ZX-HD   | 90   | 54 lbs |
| RE6040ZX-HD  | 6.0 X 4.0 ZX-HD   | 90   | 51 lbs |
| RE6040MH     | 6.0 X 4.0 Met-HD  | 90   | 51 lbs |
| RE6040HH     | 6.0 X 4.0 HD-HD   | 90   | 51 lbs |

**Our “fat back” manganese elbows are engineered for extended wear life and abrasion**

## SLICKLINE



| Part No.    | Size | Wall Thickness | Weight  | WP/BP     |
|-------------|------|----------------|---------|-----------|
| PS2010910HH | 2.0  | 0.157/4mm      | 29 lbs  | 2300/5500 |
| PS2512010BB | 2.5  | 0.120/3.25mm   | 38 lbs  | 1300/3000 |
| PS3012510HH | 3.0  | 0.125/3.25mm   | 45 lbs  | 1300/3000 |
| PS4012510HH | 4.0  | 0.125/3.25mm   | 61 lbs  | 1300/3000 |
| PS4023710HH | 4.0  | 0.237/6mm      | 108 lbs | 1900/6200 |
| PS5013410HH | 5.0  | 0.134/3.5mm    | 84 lbs  | 1300/3000 |
| PS5025810HH | 5.0  | 0.258/6.5mm    | 146 lbs | 1900/6200 |




# STEEL REDUCERS



| Part No.    | Size     | Length | Ends   | Weight |
|-------------|----------|--------|--------|--------|
| R-1512515GG | 1.5X1.25 | 15     | GR-GR  | 8 lbs  |
| R-252028GG  | 2.5X2.0  | 28     | GR-GR  | 18 lbs |
| R-252036GG  | 2.5X2.0  | 36     | GR-GR  | 21 lbs |
| R-302028H-G | 3.0X2.0  | 28     | HD-GR  | 21 lbs |
| R-302036H-G | 3.0X2.0  | 36     | HD-GR  | 24 lbs |
| R-302536H-G | 3.0X2.5  | 36     | HD-GR  | 26 lbs |
| R-201518HH  | 2.0X1.5  | 18     | HD-HD  | 18 lbs |
| R-252015HH  | 2.5X2.0  | 15     | HD-HD  | 10 lbs |
| R-252028HH  | 2.5X2.0  | 28     | HD-HD  | 14 lbs |
| R-252036HH  | 2.5X2.0  | 36     | HD-HD  | 21 lbs |
| R-302015HH  | 3.0X2.0  | 15     | HD-HD  | 11 lbs |
| R-302028HH  | 3.0X2.0  | 28     | HD-HD  | 21 lbs |
| R-302036HH  | 3.0X2.0  | 36     | HD-HD  | 24 lbs |
| R-302528HH  | 3.0X2.5  | 28     | HD-HD  | 20 lbs |
| R-302536HH  | 3.0X2.5  | 36     | HD-HD  | 24 lbs |
| R-403015HH  | 4.0X3.0  | 15     | HD-HD  | 16 lbs |
| R-402040HH  | 4.0X2.0  | 40     | HD-HD  | 32 lbs |
| R-402540HH  | 4.0X2.5  | 40     | HD-HD  | 37 lbs |
| R-403036HH  | 4.0X3.0  | 36     | HD-HD  | 35 lbs |
| R-503036HH  | 5.0X3.0  | 36     | HD-HD  | 38 lbs |
| R-504027M-H | 5.0X4.0  | 27     | MET-HD | 39 lbs |
| R-504036HH  | 5.0X4.0  | 36     | HD-HD  | 45 lbs |
| R-504053HH  | 5.0X4.0  | 53     | HD-HD  | 58 lbs |

## BOOM PUMP REDUCERS

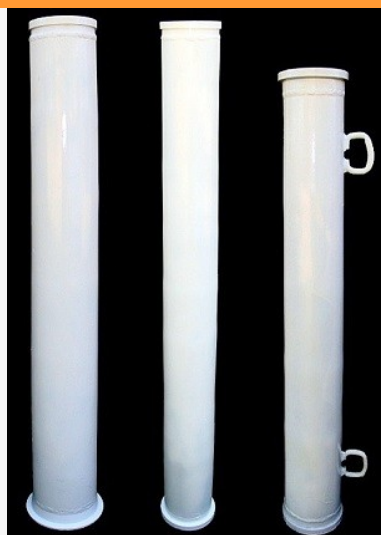

| Part No.           | Size    | Length | Ends  | Weight  |
|--------------------|---------|--------|-------|---------|
| R-403515HH         | 4.0X3.0 | 15     | HD-HD | 15 lbs  |
| R-504015M-HD       | 5.0X4.0 | 15     | M-HD  | 20 lbs  |
| R-503036M-HD       | 5.0X3.0 | 36     | M-HD  | 45 lbs  |
| R-504036M-HD       | 5.0X4.0 | 36     | M-HD  | 45 lbs  |
| R-605047.25HI-M    | 6.0X5.0 | 1200mm | HI-M  | 72 lbs  |
| R-605047.25MM      | 6.0X5.0 | 1200mm | M-M   | 72 lbs  |
| R-605063FM-M       | 6.0X5.0 | 1600mm | FM-M  | 100 lbs |
| <b>DOUBLE WALL</b> |         |        |       |         |
| R-DW504036M-HD     | 5.0X4.0 | 36     | HD-HD | 54 lbs  |
| R-DW605047.25HI-M  | 6.0X5.0 | 1200mm | HI-M  |         |
| R-DW6050-47.25MM   | 6.0X5.0 | 1200mm | M-M   |         |
| R-DW605063FM-M     | 6.0X5.0 | 1600mm | FM-M  |         |

# BOOM ELBOWS



We stock every elbow we advertise. They have been performance proven for many years by many of the country's leading concrete pumping companies. The manganese construction means they work harder with use.

**“Fat Back” Manganese Cast Elbows with machined ends.  
Hardness  
58-60 Rc**

| Part No.    | Pipe ID In. | Bend |
|-------------|-------------|------|
| EL5090M     | Metric 5.0  | 90   |
| EL5045M     | Metric 5.0  | 45   |
| EL5090HD    | HD 5.0      | 90   |
| EL5045HD    | HD 5.0      | 45   |
| EL5030M     | Metric 5.0  | 30   |
| EL5020M     | Metric 5.0  | 20   |
| EL50325M    | Metric 5.0  | 32.5 |
| EL5030(PM)M | Metric 5.0  | 30   |
| EL5015M     | Metric 5.0  | 15   |
| EL5014M     | Metric 5.0  | 14   |

# DOUBLE WALL ELBOWS



**Hardness 63-67 Rc**

| Part No.    | Pipe ID In. | Bend |
|-------------|-------------|------|
| DW-EL5090M  | Metric 5.0  | 90   |
| DW-EL5045M  | Metric 5.0  | 45   |
| DW-EL50325M | Metric 5.0  | 32.5 |
| DW-EL5030M  | Metric 5.0  | 30   |
| DW-EL5020M  | Metric 5.0  | 20   |
| DW-EL5014M  | Metric 5.0  | 14   |

We carry most of the same elbows in double/twin wall as well, giving you much longer life on your pump

# BOOM PIPE



## SINGLE WALL

| Part No.   | ID In.      | Wall Thickness | Length | Hardness |
|------------|-------------|----------------|--------|----------|
| SW-3M BOOM | 4.8/123.4mm | 0.188/7ga      | 3M     | 58-60 Rc |
| SW-4M BOOM | 4.8/123.4mm | 0.188/7ga      | 4M     | 58-60 Rc |
| SW-5M BOOM | 4.8/123.4mm | 0.188/7ga      | 5M     | 58-60 Rc |
| SW-3M DECK | 4.8/123.4mm | 0.277/7mm      | 3M     | 58-60 Rc |
| SW-5M DECK | 4.8/123.4mm | 0.277/7mm      | 5M     | 58-60 Rc |

## DOUBLE WALL

| Part No.   | ID In.      | Wall Thickness | Length | Hardness |
|------------|-------------|----------------|--------|----------|
| DW-BOOM 3M | 4.8/123.4mm | 3mm+1.5mm      | 3M     | 63-67 Rc |
| DW-BOOM 4M | 4.8/123.4mm | 3mm+1.5mm      | 4M     | 63-67 Rc |
| DW-BOOM 5M | 4.8/123.4mm | 3mm+1.5mm      | 5M     | 63-67 Rc |
| DW-DECK 3M | 4.8/123.4mm | 4.5mm+3.0mm    | 3M     | 63-67 Rc |
| DW-DECK 4M | 4.8/123.4mm | 4.5mm+3.0mm    | 4M     | 63-67 Rc |

- INNER WALL HARDNESS OF FROM 58-67 ROCKWELL
  - DEEPER HEAT PENETRATION FOR LONGER WEAR
  - SEAMLESS TUBING AS OPPOSED TO ERW WELDED PIPE
  - ALL SW & DW PIPE HAVE CAST CHROMIUM-STEEL ALLOY INSERTS
  - INDEPENDENTLY LAB TESTED
- ALSO AVAILABLE NON HARDENED—SPECIAL ORDER



## BOOM AND DECK WELD-ON ENDS

|               |             |                                |                |
|---------------|-------------|--------------------------------|----------------|
| SW-WOE-M-BOOM | 4.8/123.4mm | Full Flow Chrome Cast. Inserts | 58-61 Rockwell |
| SW-WOE-M-DECK | 4.8/123.4mm | Full Flow Chrome Cast. Inserts | 58-61 Rockwell |

## U-BOLTS, MAKE-UPS AND FULL SYSTEMS (call 1-800-567-7400 for details)





# HOSE—FABRIC-REINFORCED

Pump Parts Plus Brand



| Part No.       | Size In. | Lengths Ft.     | Working PSI |
|----------------|----------|-----------------|-------------|
| FAB-PPP-1.50   | 1.5      | 50              | 1200 PSI    |
| FAB-PPP-2.0    | 2.0      | 25              | 1200 PSI    |
| FAB-PPP-2.0    | 2.0      | 50              | 1200 PSI    |
| FAB-PPP-2.5    | 2.5      | 25              | 1200 PSI    |
| FAB-PPP-2.5    | 2.5      | 50              | 1200 PSI    |
| FAB-PPP-3010HH | 3.0      | 10              | 800 PSI     |
| FAB-PPP-3.0    | 3.0      | 12.5            | 800 PSI     |
| FAB-PPP-3.0    | 3.0      | 25              | 800 PSI     |
| FAB-PPP-3.5    | 3.5      | 10, 12.5        | 800 PSI     |
| FAB-PPP-4010HH | 4.0      | 10              | 800 PSI     |
| FAB-PPP-4.0    | 4.0      | Specify Length  | 800 PSI     |
| FAB-PPP-4.5M   | 4.5      | 10, 12.5 Metric | 800 PSI     |
| FAB-PPP-5010HH | 5.0      | 10              | 800 PSI     |
| FAB-PPP-5012MB | 5.0      | 12.5            | 800 PSI     |

Single-ended tip hoses available in all sizes



We stock 1.5" - 5" hose. Our in-house hose is manufactured to stringent specifications, meeting or exceeding industry standards. All of our ends are full flow heat-treated for longer life and smooth transition from hose to end. Custom lengths are available. Non-marking hose is available in 1.5" & 2.0" sizes.





# HOSE—STEEL-REINFORCED 1275 PSI

Pump Parts Plus Brand



| Part No.      | Size In. | Length Ft. |
|---------------|----------|------------|
| SW-PPP-2025HH | 2.0      | 25         |
| SW-PPP-2050HH | 2.0      | 50         |
| SW-PPP-2525HH | 2.5      | 25         |
| SW-PPP-3010HH | 3.0      | 10         |
| SW-PPP-3025HH | 3.0      | 25         |
| SW-PPP-4010HH | 4.0      | 10         |
| SW-PPP-4025HH | 4.0      | 25         |
| SW-PPP-5010HH | 5.0      | 10         |
| SW-PPP-5010MM | 5.0      | 10 Metric  |
| SW-PPP-5012HH | 5.0      | 12.5       |
| SW-PPP-5020HH | 5.0      | 20         |
| SW-PPP-5025HH | 5.0      | 25         |

This is our exclusive Pump Parts Plus, Inc. steel-reinforced concrete placing hose. Our hose is reinforced with 4 plies and has a 1275 PSI working pressure. We can accommodate most length requirements for your job. Call us for a quote.

**TUBE:** EXTRUDED BLACK CONDUCTIVE NR-ABRASION RESISTANT LINER

**REINFORCEMENT:** 4 PLY HIGH TENSILE STRENGTH STEEL WIRE

**COVER:** BLACK CONDUCTIVE SBR/NR BLEND-ABRASION AND OZONE RESISTANT

**APPLICATION:** HIGH PRESSURE CONCRETE PLACEMENT AND PUMPING

**TEMPERATURE:** 30°C + 80°C (-22°F+176°F)

WE ARE PROUD TO BRING YOU ONE OF THE FINEST STEEL REINFORCED CONCRETE HOSES. MANUFACTURED USING QUALITY SPECIFICATIONS THAT ARE AT/ABOVE INDUSTRY STANDARDS. (ACPA—ASME)

## SPECIALTY HOSE AND HOSE SLEDS

Now available to Pump Parts Plus are reducing hoses, lay flat hoses and hose sleds. Steel sleds and lightweight vacuum-formed poly sleds (not pictured) available. Call for a quote.



| Reducing Hose—In. | Lgth Ft.       |
|-------------------|----------------|
| 5.0x4.0           | 12.5           |
| 4.0x3.5           | 10             |
| 5.0x3.0           | 12             |
| Lay Flat—Size In. | Lgth Ft.       |
| 4.0               | Please specify |



| Hose Sleds | Weight |
|------------|--------|
| Steel      | 32 lbs |
| Poly       | 5 lbs  |

# SHOTCRETE NOZZLE ASSEMBLIES



| Part No.      | Description                         |
|---------------|-------------------------------------|
| Shot Assy 2.0 | 2.0 Shotcrete Nozzle Assembly Kit   |
| HN20LS Tips   | 2.0x1.25x7.0 OAL Rubber Nozzle Only |
| HD Inserts    | Steel Heat-Treated Insert w/ HD End |
| GR Inserts    | Steel Heat-Treated Insert w/ GR End |

## Shotcrete Hose 1275 PSI



| Part No. | Description     |
|----------|-----------------|
| SWH2025  | 2.0 X 25 LENGTH |
| SWH2050  | 2.0 X 50 LENGTH |
| SWH2525  | 2.5 X 25 LENGTH |

**Steel wire reinforced hose is ideal for Shotcrete jobs. Rated at 1275 PSI working pressure**

## External Hose Stems & Ferrules



| Part No.   | Description        |
|------------|--------------------|
| HSA20HD    | 2.0 HSA HD         |
| HSA25HD    | 2.5 HSA HD         |
| HSA30HD    | 3.0 HSA HD         |
| HSA35HD    | 3.5 HSA HD         |
| HSA4035HDR | 4.0-3.5 HSA HD     |
| HSA40HD    | 4.0 HSA HD         |
| HSA5045HDR | 5.0-4.5 HSA HD     |
| HSA5045MR  | 5.0-4.5 HSA Metric |
| HSA50HD    | 5.0 HSA HD         |
| HSA50M     | 5.0 HSA Metric     |

## Internal Stems & Ferrules



**We carry just about all sizes of internal hose stems & ferrules for your pumping needs. Please ask a sales representative for more details by calling us toll free at 1-800-567-7400.**

# CLEAN OUT ACCESSORIES



| Part No. | Description                        | Line Size In. | Ball Size |
|----------|------------------------------------|---------------|-----------|
| COBS20   | Sponge Clean-Out Ball              | 2.0           | 2.0       |
| COBS30   | Sponge Clean-Out Ball              | 3.0           | 3.0       |
| COBS40   | Sponge Clean-Out Ball              | 4.0           | 4.0       |
| COBS50M  | Sponge Clean-Out Ball Med Density  | 5.0           | 5.0       |
| COBS50H  | Sponge Clean-Out Ball Hard Density | 5.0           | 5.0       |
| COBS50S  | Sponge Clean-Out Ball Soft Density | 5.0           | 5.0       |
| COB60    | Sponge Clean-Out Ball              | 6.0           | 6.0       |


## Ball-Catchers and Blow-Out Caps available in 2.0 to 5.0

| Part No. | Description                              |
|----------|------------------------------------------|
| BOC2HD   | 2.0 Blow Out Cap w/ (2) .75 Ball Valve   |
| BOC2.5HD | 2.5 Blow Out Cap w/ (2) .75 Ball Valve   |
| BOC3HD   | 3.0 Blow Out Cap w/ (2) .75 Ball Valve   |
| BOC4HD   | 4.0 Blow Out Cap w/ (2) .75 Ball Valve   |
| BOC5M    | 5.0 M Blow Out Cap w/ (2) .75 Ball Valve |

| Part No. | Description             |
|----------|-------------------------|
| BC2HD    | 2.0 HD BALL CATCHER     |
| BC25HD   | 2.5 HD BALL CATCHER     |
| BC3HD    | 3.0 HD BALL CATCHER     |
| BC4HD    | 4.0 HD BALL CATCHER     |
| BC5HD    | 5.0 HD BALL CATCHER     |
| BC5M     | 5.0 METRIC BALL CATCHER |



# WASH-OUT HOOKS

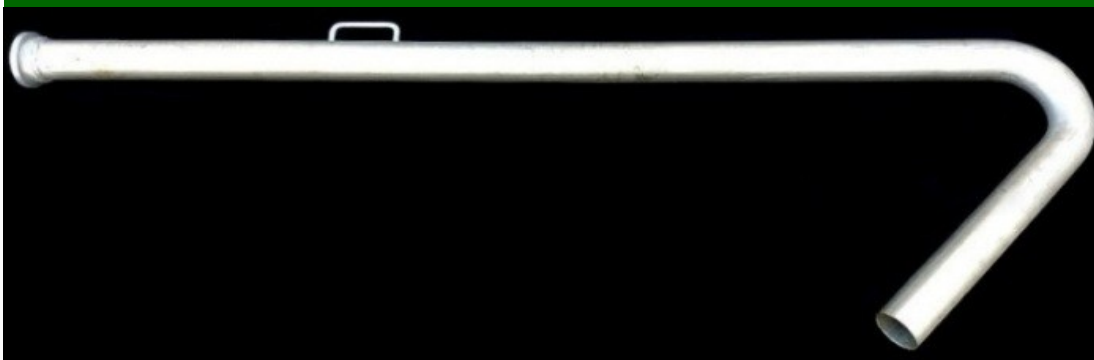

| Part No.   | Description          |
|------------|----------------------|
| WO-HOOK2   | 2.0 WASHOUT HOOK—HD  |
| WO-HOOK2.5 | 2.5 WASHOUT HOOK—HD  |
| WO-HOOK3   | 3.0 WASHOUT HOOK -HD |
| WO-HOOK4   | 4.0 WASHOUT HOOK-HD  |

Wash-Out Hooks Have 78 In. Height (lightweight construction)



# COUPLINGS

## HEAVY DUTY



| Part No.  | Size In.   | Weight | WP      |
|-----------|------------|--------|---------|
| CL15HD    | 1.5 HD     | 4 lbs  | 130 bar |
| CL20HD    | 2.0 HD     | 5 lbs  | 130 bar |
| CL25HD    | 2.5 HD     | 6 lbs  | 130 bar |
| CL30HDADJ | 3.0 HD ADJ | 9 lbs  | 130 bar |
| CL40HDADJ | 4.0 HD ADJ | 12 lbs | 130 bar |
| CL50HDADJ | 5.0 HD ADJ | 16 lbs | 130 bar |
| CL30HD    | 3.0 HD     | 7 lbs  | 130 bar |
| CL40HD    | 4.0 HD     | 11 lbs | 130 bar |
| CL50HD-NA | 5.0 HD     | 13 lbs | 130 bar |
| CL60HDADJ | 6.0 HD ADJ | 17 lbs | 130 bar |

## GROOVED



| Part No. | Size In. | Weight |
|----------|----------|--------|
| CL20GR   | 2.0 GR   | 3 lbs  |
| CL25GR   | 2.5 GR   | 4 lbs  |



# COUPLINGS

## 5 IN. METRIC



| Part No.             | Size In.                       | Wt     | WP      |
|----------------------|--------------------------------|--------|---------|
| CL50M-1-BOLT         | 5.0 Met 1 Bolt                 | 10 lbs | 130 bar |
| CL50M-2-BOLT         | 5.0 Met 2 Bolt                 | 10 lbs | 130 bar |
| CL50M-2-BOLT<br>BASE | 5.0 Met 2 Bolt<br>w/ Base      | 12 lbs | 130 bar |
| CL50M-NA BASE        | 5.0 Met NA Snap<br>Base (Deck) | 13 lbs | 130 bar |
| CL50MADJ             | 5.0 Met ADJ                    | 16 lbs | 130 bar |
| CL50M-NA             | 5.0 Met NA                     | 13 lbs | 130 bar |
| 10133242             | Schwing 5.0 Met<br>Tip         | 12 lbs | 130 bar |



## 6 IN. METRIC




| Part No.   | Size In.         | Weight |
|------------|------------------|--------|
| 240948003  | 6.0 1 - Bolt Met | 19 lbs |
| 10043559   | 6.0 Wedge Met    | 18 lbs |
| CL60MET-NA | 6.0 Met NA       | 17 lbs |

# GASKETS

## METRIC



**METRIC V-STYLE**



**HEAVY DUTY**



**METRIC CAVITY**



**METRIC PUTZ-STYLE**

| Part No.      | Size In.             |
|---------------|----------------------|
| GAS50M-V      | 5.0 Metric V-Style   |
| GAS50M-C      | 5.0 Metric Cavity    |
| GAS50M-PM     | 5.0 Metric Putz      |
| GAS60M        | 6.0 Metric           |
| GAS50M-C-NEOP | 5.0 M C Neoprene Red |
| GAS50M-V-NEOP | 5.0 M V Neoprene Red |

## HEAVY DUTY & GROOVED



| Part No. | Size In.    |
|----------|-------------|
| GAS20GR  | 2.0 Grooved |
| GAS25GR  | 2.5 Grooved |
| GAS20HD  | 2.0 HD      |
| GAS25HD  | 2.5 HD      |
| GAS30HD  | 3.0 HD      |
| GAS40HD  | 4.0 HD      |
| GAS50HD  | 5.0 HD      |
| GAS60HD  | 6.0 HD      |

# WELD ON ENDS



## GROOVED

| Part No. | ID In. | Weight   |
|----------|--------|----------|
| WE20GR   | 2.0    | .50 lbs  |
| WE25GR   | 2.5    | .65 lbs  |
| WE30GR   | 3.0    | 1.00 lbs |

## RAISED—HEAVY DUTY, METRIC AND EUROPEAN

| Part No.      | ID In.                 | Weight                                        |
|---------------|------------------------|-----------------------------------------------|
| WE20HD        | 2.0                    | 1.00 lbs                                      |
| WE25HD        | 2.5                    | 1.00 lbs                                      |
| WE30HD        | 3.0                    | 2.00 lbs                                      |
| WE40HD        | 4.0                    | 2.25 lbs                                      |
| WE50HD        | 5.0                    | 3.30 lbs                                      |
| WE50M         | 5.0                    | 2.30 lbs                                      |
| WE60HD        | 6.0                    | 4.00 lbs                                      |
| WE60MF        | 6.0 (Female Schwing)   | 4.00 lbs                                      |
| WE60ZX        | 6.0 (Hi Pressure Putz) | 5.00 lbs                                      |
| SW-WOE-M-BOOM | 4.8/123.4mm            | Full Flow Chrome Cast. Inserts 58-61 Rockwell |
| SW-WOE-M-DECK | 4.8/123.4mm            | Full Flow Chrome Cast. Inserts 58-61 Rockwell |



# REED TRAILER PARTS




**ALSO AVAILABLE IN CARBIDE**

| Part No. | Description                            |
|----------|----------------------------------------|
| R72310HF | Cutting Ring B50/C50 - Hard Face       |
| R86031HF | Wear Plate B50/C50 - Hard Face         |
| R77120   | Thrust Spring For Cutting Ring B50/C50 |
| R70048   | Piston Cup 6" - B50/C50                |



# SCHWING TRAILER PARTS

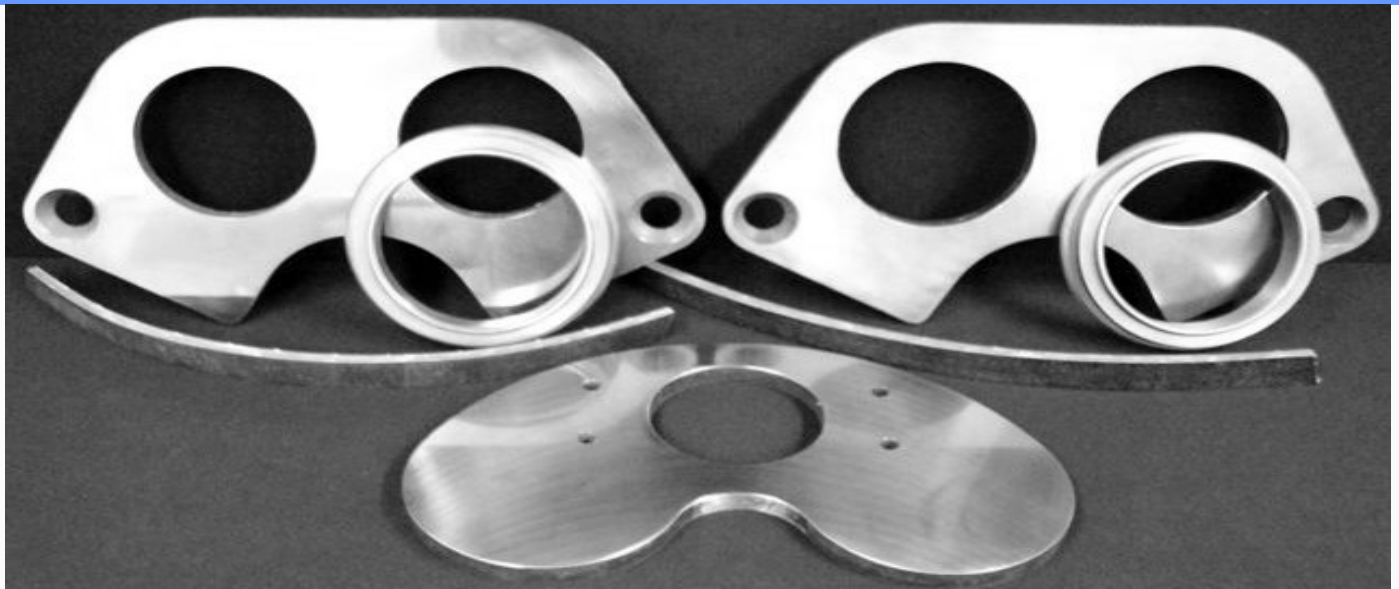

| Part No.            | Description                          |
|---------------------|--------------------------------------|
| 30391049 / 10063938 | Hard-faced DN165 Cutting Ring        |
| 30391048 / 10129809 | Hard-faced DN150 Wear Plate          |
| 30391266 / 10129807 | Hard-faced DN180 Wear Plate          |
| 30391048 / 10129809 | Carbide DN150 Wear Plate             |
| 30391266 / 10129807 | Carbide DN180 Wear Plate             |
| 30391049 / 10063938 | Carbide DN165 Cutting Ring           |
| 10025851            | DN135 Kidney Plate (outlet side)     |
| 10032182            | DN135 Kidney Seal                    |
| 10161863            | DN150 Ram Flange                     |
| 10161781            | DN180 Ram Flange                     |
| 10064473            | DN165 Pressure Spring                |
| 30373731            | CYLINDER 150MM CHROME 450/500/750-15 |
| 30390491            | CYLINDER 180MM CHROME 750/1000-18    |



# SCHWING BOOM PUMP PARTS



| Part No. | Description                    |
|----------|--------------------------------|
| 10074769 | Mounting Plate 180, 200, 230mm |
| 10074766 | DN180 Wear Plate               |
| 10074767 | DN200 Wear Plate               |
| 10074768 | DN230 Wear Plate               |
| 10063939 | DN230 Cutting Ring             |
| 10064472 | Pressure Spring                |
| 10029138 | Kidney Seal                    |
| 10018046 | Kidney Plate (outlet side)     |
| 10018029 | Cover Lining                   |
| 10161754 | DN200 Ram Flange               |
| 10161634 | DN230 Ram Flange               |
| 10161980 | DN250 Ram Flange               |



**Please ask a sales representative about our available carbide wear plates as well**

| Part No.    | Description              |
|-------------|--------------------------|
| R605063FM/M | 6"x5"x1600mm Reducer     |
| 10069521    | DN150 Elbow w/ extension |
| 10017547    | DN180xDN150 Hinged Elbow |
| 10026159    | DN180 14 Degree Elbow    |
| 10080782    | Hopper Door              |
| 10035783    | Hopper Door Sealing Ring |
| 10043559    | DN150 Wedge Clamp        |
| 10004761    | DN150 D-Ring Seal        |





| Part No. | Description                      |
|----------|----------------------------------|
| 10019377 | Material Cylinder 230mm x 2133mm |



# SCHWING BOOM PUMP PARTS



| Part No. | Description                    |
|----------|--------------------------------|
| 10167218 | Agitator Paddle (bent T shape) |
| 10167219 | Agitator Paddle (D shape)      |

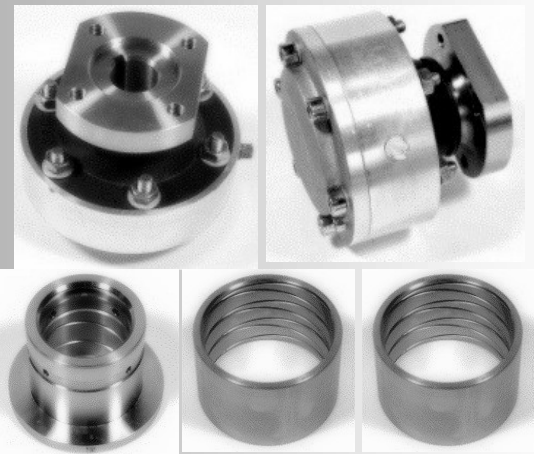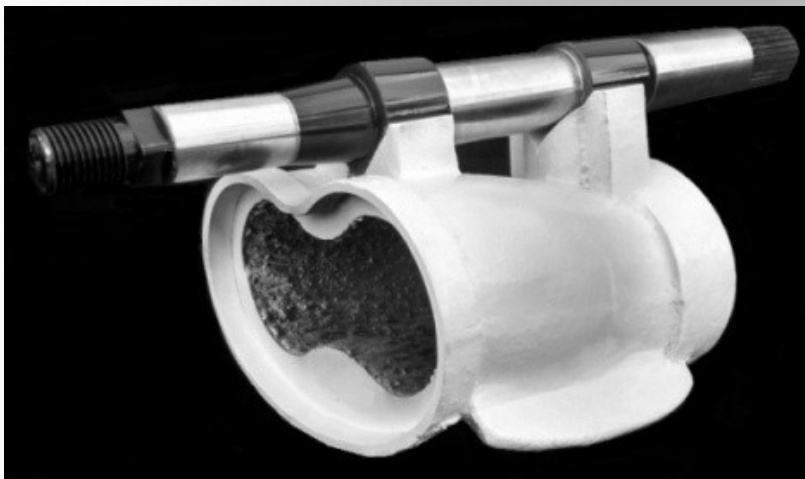

| Part No. | Description                              |
|----------|------------------------------------------|
| 10061072 | Agitator Drive Side Bearing (complete)   |
| 10061073 | Agitator Fixed Side Bearing (complete)   |
| 10018037 | Rock Valve Shaft Bushing Bearing (small) |
| 10018047 | Large Rock Valve Shaft Bushing Bearing   |
| 10181912 | B-Rock Valve                             |
| 10180090 | B-Rock Valve Shaft                       |

# PUTZMEISTER WEAR PARTS



| Part No.    | Description                   |
|-------------|-------------------------------|
| 251014007   | S2018 Small Mouth S-Tube      |
| 440621      | S2318 Large Mouth S-Tube      |
| 228383004   | Chrome Sleeve                 |
| 240391003   | Large Seal Housing            |
| 240391003SK | Large Seal Housing Seal Kit   |
| 027864009   | Bearing Assembly S-Tube Shaft |



| Part No.         | Description                 |
|------------------|-----------------------------|
| 279856001        | Transition Elbow w/ Port    |
| 279856001        | Transition Elbow No Port    |
| 104003           | DN150 High Pressure Elbow   |
| RHL605047.25HI-M | 6.0x5.0x1200mm Reducer HP-M |
| RHL605047.25MM   | 6.0x5.0x1200mm Reducer M-M  |
| 240948003        | DN150 Wedge Clamp           |

| Part No.  | Description                       |
|-----------|-----------------------------------|
| 239867001 | 9" Material Cylinder 230mmx2133mm |




# PUTZMEISTER WEAR PARTS

## WEAR PLATES & CUTTING RINGS



Please ask a sales representative about our available carbide wear plates as well

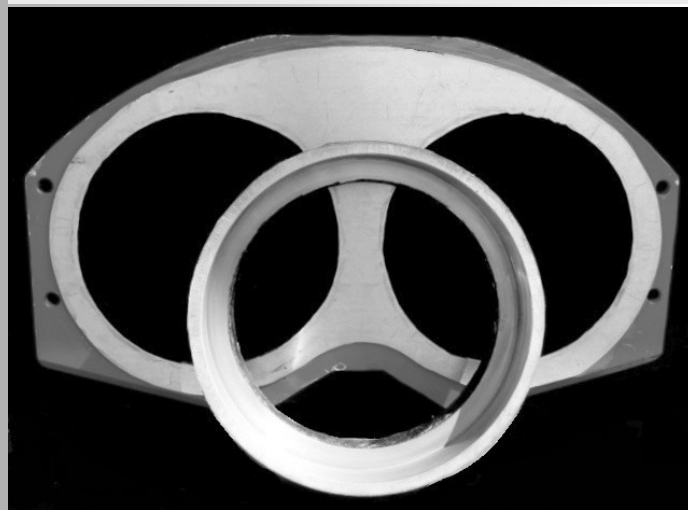

| Part No.  | Description                        |
|-----------|------------------------------------|
| 240111005 | DN230 Spectacle Plate (hard-faced) |
| 251031006 | DN230 Cutting Ring (hard-faced)    |
| 099011    | DN230 Thrust Ring                  |
| 261122002 | DN280 Spectacle Plate (hard-faced) |
| 261123001 | DN280 Cutting Ring (hard-faced)    |
| 458878    | Thrust Ring                        |

## BOOM PUMP AGITATOR PARTS



Will replace 50mm  
agitator bearings



| Part No.  | Description                |
|-----------|----------------------------|
| 275587002 | Mixer End Shaft 60mm       |
| 242573007 | Bearing Flange             |
| 242574006 | Rubber Seal                |
| 222484006 | Bushing 60mm               |
| 043909003 | O-Ring                     |
| 238340008 | Hydraulic Motor 35mm Shaft |



# MISC. PUMP PARTS / VALVES



## Part No.

## Description

|         |                                     |
|---------|-------------------------------------|
| HSO20HD | HAMMER SHUT OFF VALVE - 2.0" HD     |
| HSO25HD | HAMMER SHUT OFF VALVE - 2.5" HD     |
| HSO30HD | HAMMER SHUT OFF VALVE - 3.0" HD     |
| HSO40HD | HAMMER SHUT OFF VALVE - 4.0" HD     |
| HSO50HD | HAMMER SHUT OFF VALVE - 5.0" HD     |
| HSO50M  | HAMMER SHUT OFF VALVE - 5.0" METRIC |



## BALLS & SEATS

**Seats:** Olin, TA

**Steel Balls:** PM, Schwing,  
Olin, TA, Mayco

# HOSE SLEDs



## HOSE SLEDs — AVAILABLE IN STEEL & VACUUM FORMED POLY

## Part No.

## Description

|              |                                               |
|--------------|-----------------------------------------------|
| SLED2-5POLY  | HOSE SLED 27" DIAMETER<br>LIGHTWEIGHT 5.0 LBS |
| SLED345STEEL | HOSE SLED 26" DIAMETER -<br>STEEL (32.0 LBS)  |



# MISC. PUMPING ACCESSORIES

## WASH-OUT TRAYS



- Made from ABS plastic so they are durable
- Keeps your work area clean of concrete & wash-out water
- Oil resistant to catch oil drips, leaks
- Can ship via truck freight with your hoses stacked on top

## SAFETY STRAPS & SLINGS



← Boom Tie-Down Strap (and below)



## HOPPER VIBRATORS

Also available in 24 volt, please specify upon ordering.

| Part Number | Description            |
|-------------|------------------------|
| MVE-200DC   | MVE 200 DC-12 Vibrator |



# CHEMICALS & ADD MIXTURES

## CONCRETE REMOVER



- Removes hardened concrete, mortar build-up, splatter and lime scale
- Non-corrosive and non-hazardous, safe for the environment
- Safe on paint, glass, metal & plastic surfaces
- Cost effective, dilutes up to 8:1 in water
- Biodegradable
- No harmful solvents
- Come in 5 gallon pails & 55 gallon drums
- VOC compliant
- Can order larger quantities, just specify

## CRETE-LUBE



- 100% non-toxic concrete pump lubricant
- Made from environmentally safe polysaccharides
- Will not harm skin or eyes
- Cleans up easily with water, clean drying
- Natural water-based
- Compatible with all materials and equipment
- Come in boxes of 50 packets



# WIRELESS REMOTE CONTROLS

Manufactured by Microtronics, Inc.

**Pump Parts Plus, Inc. is an Official Distributor of Microtronics, Inc.'s  
Wireless Remote Controls**



## **2.4 GHz Horizontal Bang Bang Joystick**

**Enclosure:** Die Cast Aluminum

**Color:** Yellow or Gray

**Decal:** Customizable

**Switch:** Environmentally Sealed, 2, 4 or 8 Way Bang Bang Joysticks

**Dimensions:** 6 7/8" L x 3" W x 2 1/4" D

**Antenna:** External 2.4 GHz

**Weight:** 3 1/2 lbs.

**Address Code:** 4.2 Billion

**Operating Temp:** -20c to +50c

**Range:** 300 ft.

**Frequency:** 2.4 GHz FH/DSSS

**Power Source:** 9 Volt Battery

**Current Draw:** 20 Milliamps

**Output Controls:** 1-16 Outputs

**Seal:** Oil and Petroleum Resistant Neoprene Rubber Gasket

**Standard Features:** Power Switch, Emergency Stop Switch, Customizable Decal,

Control Guard Set, Neck Strap, External Antenna

**Options:** Belly Strap, Cab Clip

**Joystick works well with multi-section Boom Pumps. Membrane works with Trailer Pumps.**

## **2.4 GHz Membrane**

**Enclosure:** ABS Plastic

**Color:** Black

**Decal:** Customizable

**Switch Type:** Membrane Pad

**Dimensions:** 4 3/4" L x 2 3/8" W x 1" D

**Antenna:** Internal 2.4 GHz

**Weight:** 8 oz.

**Address Code:** 4.2 Billion

**Operating Temp:** -20c to +50c

**Range:** 300 ft.

**Frequency:** 2.4 GHz FH/DSSS

**Power Source:** 9 Volt Battery

**Current Draw:** 20 Milliamps

**Output Controls:** 1-10 Outputs

**Standard Features:** Power Switch, Emergency Stop Switch, Customizable Decal, Internal Antenna

**Options:** Magnetic Protective Boot (Yellow, Black or Orange) with Optional Neck Strap or Retractable Belt Clip



# NOTES AND CONTACT INFORMATION

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

---

**Contact Information:**  
**Pump Parts Plus, Inc.**  
**20825 Aubry Street**  
**Perris, CA 92570 USA**  
**Ph: 951-940-8300**  
**Fx: 951-657-8155**  
**Tf: 800-567-7400**  
**[www.pumppartsplus.com](http://www.pumppartsplus.com)**

**Call: 800-567-7400**

**Email:**

Vice President: [jonathan@pumppartsplus.com](mailto:jonathan@pumppartsplus.com)

Owner/President: [gary@pumppartsplus.com](mailto:gary@pumppartsplus.com)

Office: [jason@pumppartsplus.com](mailto:jason@pumppartsplus.com)

# **PUMP PARTS PLUS – Fax 951-657-8155**

## **Credit Card Authorization**

**Company Name:** \_\_\_\_\_

**Customer Phone:** \_\_\_\_\_

**Fax Number:** \_\_\_\_\_

**Date:** \_\_\_\_\_

**Card Type:** \_\_\_\_\_ **Issuing Company:** \_\_\_\_\_

**C.C. Co. phone#:** \_\_\_\_\_

**Card Number:** \_\_\_\_\_

**Exp Date:** \_\_\_\_\_

**Security Code:** \_\_\_\_\_

**Name On Card:** \_\_\_\_\_

**Billing address of card holder:** \_\_\_\_\_  
\_\_\_\_\_

**Total Amount to Charge:** \_\_\_\_\_

**I hereby authorize PPP use of card on following invoices:** \_\_\_\_\_

**Signature of Cardholder**

\_\_\_\_\_

**Print of above Signature**

\_\_\_\_\_

**Shipping address:**

**e-mail address:**

\_\_\_\_\_

\_\_\_\_\_

\_\_\_\_\_

**EMAIL TO JONATHAN@PUMPPARTSPLUS.COM OR FAX TO # ABOVE.**





Member of the ACPA

Founder & President Gary Fraser